










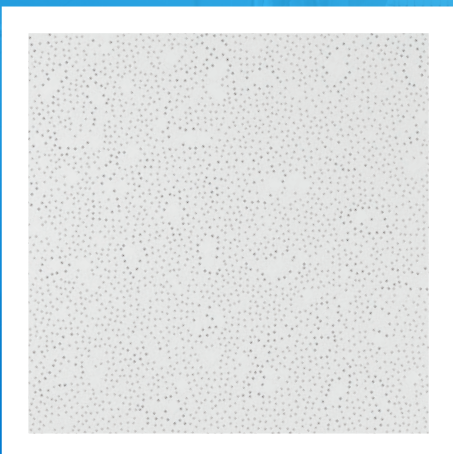











AMF ECOMIN Filigran

- AMF ECOMIN Filigran is a cost-effective ceiling solution with a perforated surface, and is suitable for areas requiring good sound absorption
- High light reflectance (86%)
- Ideal for retail environments



AMF ECOMIN FILIGRAN

Edge details Additional edge details on request	 Board 														
Thickness (mm)	 13														
Dimensions (mm) Additional sizes on request	 600 x 600 1200 x 600														
System	 Exposed demountable - System C														
Weight	 2.9 - 3.1 kg / m ²														
Colour	 White														
Sound absorption	 EN ISO 354 $\alpha_w = 0.55$ as per EN ISO 11654 - Class D <table border="1" data-bbox="464 887 1453 958"> <thead> <tr> <th>Frequency <i>f</i> (Hz)</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>α_p</td> <td>0.45</td> <td>0.45</td> <td>0.45</td> <td>0.60</td> <td>0.60</td> <td>0.50</td> </tr> </tbody> </table> NRC = 0.50 as per ASTM C 423	Frequency <i>f</i> (Hz)	125	250	500	1000	2000	4000	α_p	0.45	0.45	0.45	0.60	0.60	0.50
Frequency <i>f</i> (Hz)	125	250	500	1000	2000	4000									
α_p	0.45	0.45	0.45	0.60	0.60	0.50									
Fire reaction	 Euroclass A2-s1, d0 as per EN 13501-1 RUS KM1 (G1, V1, D1, T1) as per 123-FZ														
Light reflectance	 86%														
Thermal conductivity	 $\lambda = 0.060$ W/mk as per EN 12667														
Humidity resistance	 70% RH														
Indoor air quality	  A+ E1														
Cleanability	 														
Sustainability	   35-46%														

Products may vary from country to country. Please contact your local sales representative. For further information and legal notice, please visit our website.